

LightStream™ XGA 1024 x 768 Networkable Projector

True-to-Life Color + Smart Design

PJD6352



Featuring true-to-life color and a smart design, the ViewSonic® LightStream PJD6352 networkable projector makes the grade in any classroom, and helps corporate users rise to the top in any boardroom. Equipped with an exclusive SuperColor™ technology and a high-brightness output, this projector strikes a perfect balance of color and light to deliver the ultimate in color accuracy without compromise. A smart and intuitive design includes PortAll™—a hidden MHL/HDMI port perfect for wireless dongles that let you wirelessly stream multimedia content from a mobile device, or notebook PC, to the projector. What's more, with a wider optical zoom as well as horizontal and vertical keystone correction, this projector provides for flexible setup. Equipped with an easy-to-use network management system that lets you remotely control over 250 LightStream projectors, the PJD6352 is great for use in multiple classrooms across an entire campus, or multiple meeting rooms in an office building.

Key Features:

- Best in class color accuracy
- Secure MHL/HDMI port
- Network capable
- Smart design
- Enhanced sound

Designed for:


- Education
- Business

LightStream™ XGA 1024 x 768 Networkable Projector



PJD6352

Projection Distance		Screen Size (4:3 Diagonal)	
Inches	Meters	Inches	Meters
36-47	0.9-1.2	30	0.8
48-63	1.2-1.6	40	1.0
73-94	1.8-2.4	60	1.5
97-126	2.5-3.2	80	2.0
121-157	3.1-4.0	100	2.5
182-236	4.6-6.0	150	3.8
242-315	6.2-8.0	200	5.1
303-394	7.7-10.0	250	6.4
363-472	9.2-12.0	300	7.6

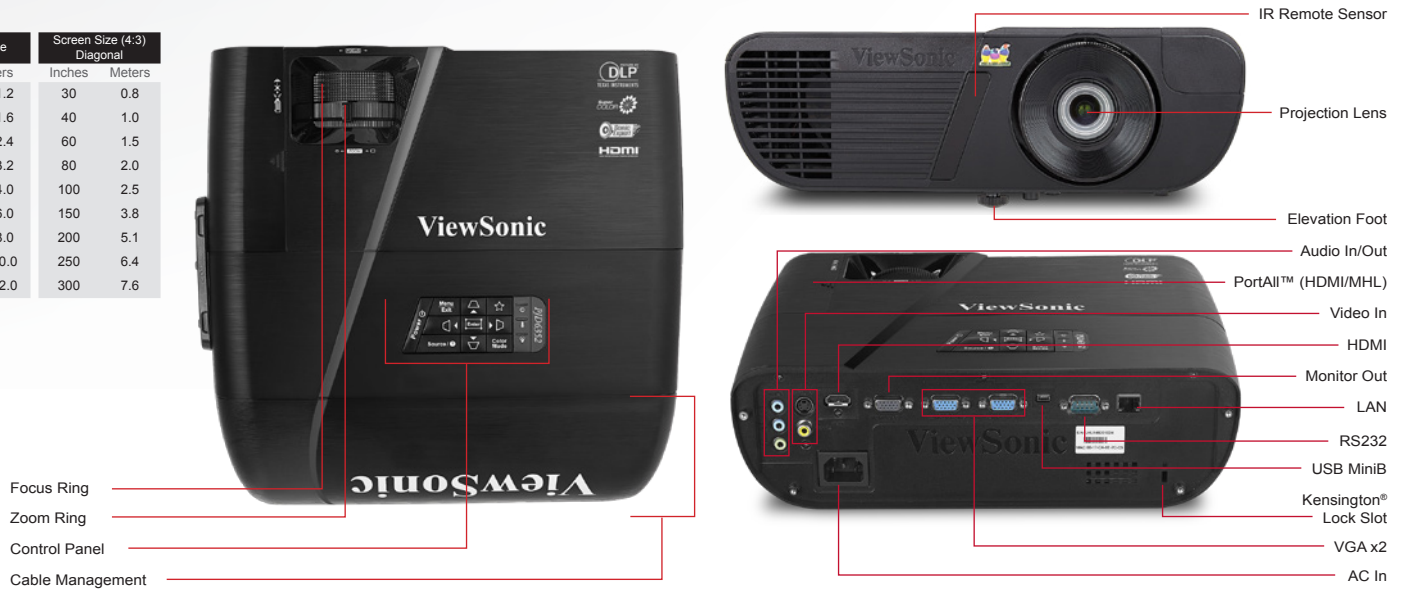

Specifications

DISPLAY	Type	0.55" Digital Micromirror Device (DLP™)	AUDIO	Speaker	10W (x1)		
	Resolution	1024 x 768 (native)		NOISE LEVEL	Normal / Eco-mode	32 dB / 27 dB	
	Lens	1.3x manual optical zoom / manual optical focus			POWER	Voltage	100~240VAC (Auto Switching), 50-60Hz (universal)
	Keystone	Vertical (± 30°) / Horizontal (± 30°)		Consumption		330W (max) / <0.5W (stand-by mode)	
	Size	30 – 300 in. / 0.76 – 7.62 m (diagonal)		CONTROLS	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	
	Throw Distance	3.28 – 32.8 ft. / 1.0 – 10.0 m				OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
	Throw Ratio	1.51~1.97:1		OPERATING CONDITIONS	Temperature		32~104° F (0~40° C)
	Lamp	210 watt				Humidity	10~90% (non-condensing)
	Light Life	4000 / 10000* (Normal / Eco-mode)		Altitude	0~6000 ft (1828.8m)		
	Brightness	3500 lm			DIMENSIONS (W x H x D)	Physical	12.44 x 4.08 x 8.98 in. / 316 x 103.7 x 228 mm
Contrast Ratio	22,000:1 (DynamicEco mode)	Packaging	16.0 x 17.72 x 8.85 in. / 410 x 450 x 225 mm				
Aspect Ratio	4:3 (native)		WEIGHT	Net	5.1 lb. / 2.3 kg		
Color Depth	30 bits, 1.07B Color (10+10+10)	Gross			8.8 lb. / 4.0 kg		
INPUT SIGNAL	Computer and Video		NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, L, L1), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p Fh: 15~102KHz, Fv: 23~120Hz	REGULATIONS	CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE, C-Tick Mexico Energy test/Registration, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S Mark (Argentina), PSB, KCC, KC, SASO, CCC, WEEE, RoHS, REACH, SVHC, ErP		
		Frequency			WARRANTY	3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**	
COMPATIBILITY	PC	Up to 1920x1080					
	Mac®	Up to 1920x1080 (may require MAC adapter)					
CONNECTOR	Digital Input	HDMI 1.4 (x1) / HDMI/MHL (x1)					
	RGB Input	15-pin mini D-Sub (x2)					
	Composite Input	RCA jack (x1)					
	Audio In	3.5mm mini jack (x2)					
	Audio Out	3.5mm mini jack (x1)					
	Video Out	15-pin mini D-Sub (x1)					
	USB	Mini type B (mouse control and maintenance)					
LAN	RJ45						
Control	RS232						

Optional Accessories (Sold Separately)

Wireless Presentation Gateway Dongle.....	WPG-300
Wireless Presentation Gateway	WPG-370
3D Active Shutter Glasses.....	PGD-350
Universal Ceiling Mount.....	PJ-WMK-006
Carrying Case.....	PJ-CASE-008
Replacement Lamp	RLC-097
Cable Management	PJ-CM-004

What's in the box?

PJD6352 projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide), cable management



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*Lamp life may vary based on actual usage and other factors. **One year Express Exchange® service requires product registration. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies, DLP® and DLP logo are registered trademarks of Texas Instruments. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Copyright © 2016 ViewSonic Corporation. All rights reserved. [18401-00B-01/16]

www.viewsonic.com